

2015

Generator

EF1000iS



TOP FEATURES

1. Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board.
2. The EF1000iS weighs in at 27.9 pounds, making it extremely portable.
3. Noise Block is Yamaha's acoustically engineered sound reduction system which helps make the EF1000iS among the quietest portable generator in its class. (47 dBA to 57 dBA – ¼ rated to rated load).
4. Gasoline petcock lets you shut off the gas to run the carb dry for storage and helps prevent stale gas problems.
5. The EF1000iS features Smart Throttle, a load sensing rpm control that allows greater fuel efficiency and noise reduction by automatically adjusting engine speed to match the load. It will run up to 12 hours at ¼ rated load on a tank of gas.
6. The Yamaha EF1000iS inverter generator supplies clean, high quality power. The EF1000iS – with its inverter system – features Pulse Width Modulation (PWM) so voltage stability is within $\pm 1\%$, and frequency stability is ± 0.1 HZ. Its pure sine wave is as clean as or cleaner than public utilities power.
7. The Auto Warm-up feature automatically increases engine speed for 4-6 minutes to ensure smooth power delivery during cold start ups.
8. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.



2015

Generator

EF1000iS

FEATURES & BENEFITS

Lightweight, easy to carry design — Compact lightweight alternator reduces weight to 27.9 lb., the lightest eight in its class

Smart Throttle, load sensing rpm control — Greater fuel efficiency and noise reduction by automatically adjusting engine speed to match the load

Auto Warm-up — Automatically increases engine speed for 4-6 minutes to ensure smooth power delivery during cold start ups

12 Volt DC output, battery-charging cables included — Recharge 12-volt batteries for RV, auto, marine, etc.

Exclusive dual coil alternator stator — Greater output at a lower engine speed for reduced noise, fuel consumption, and engine wear

Centralized control panel — Easy access to controls

Gasoline petcock lets you shut off the gas to run the carb dry for storage — Prevents stale gas problems

50cc Overhead Valve (OHV) engine — Noise-reducing operation with improved efficiency, increased reliability, and low oil consumption

Large fuel fill access — Wide mouth fuel fill reduces spilling and overflows during refueling

EPA & CARB Emission Engine Durability Rating — Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board

50 state legal — Meets emission regulations, including CARB

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years when the generator is used for non commercial use. When the generator is used for commercial, industrial or rental use, Yamaha covers the generator for two (2) years

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Inverter
Maximum AC Output	1000 watts
Rated AC Output	900 watts
Rated / Maximum AC Current	7.5/8.3 amps @ 120V
Voltage Stability	±1%
Frequency Stability	± 0.1 Hz
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	50cc
L x W x H	17.7 x 9.4 x 14.9 in
DC Output	8 amps @ 12V
Dry Weight	27.9 lb
Fuel Tank Capacity	0.66 gal
Continuous Operation at 1/4 Rated Load	11.9 hr
Noise Level (1/4 Load - Rated Load)	47- 57 dBA
Engine Speed @ 1/4 Load	3000 rpm
Battery Charger Cord	Included
Warranty	Commercial/Rental Use Limited 2 Year Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF2000iSH



TOP FEATURES

1. Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board.
2. Gasoline petcock lets you shut off the gas to run the carb dry for storage and helps prevent stale gas problems.
3. Fuel gauge allows fuel level to be seen at-a-glance.
4. The EF2000iSH is powerful, portable and retro-modern and delivers maximum output with minimum effort. It weighs a mere 44 compact pounds, making it easy to transport.
5. The EF2000iSH is fitted with Yamaha's most technologically sophisticated muffler. It's so quiet that you can have a conversation near one and may not realize it is running. (51.5 dBA to 61 dBA – ¼ rated to rated load).
6. It is very compact (2.2 cu.ft.) which makes it easy to store and transport.
7. If you need extra juice, the EF2000iSH has you covered—a convenient parallel function lets you connect two generators to deliver up to 30 maximum amps.
8. Meets even strict California Air Resources Board and Environmental Protection Agency standards for low emissions.
9. This model is outfitted with a RealTree™ Camouflage pattern which makes it ideal for the outdoorsman.
10. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.



2015

Generator

EF2000iSH

FEATURES & BENEFITS

Camo pattern — RealTree® AP™ camoflauge pattern is ideal for the outdoorsman

Light weight — Easy transport

Super-quiet muffler with USFS-approved spark arrestor — Only 51.5 dBA at 1/4 load and eliminates errant sparks

Compact — 2.2 cu.ft. size is easy to store and transport

OHV engine — Includes steel camshaft and valve train components

OHV engine with cast iron cylinder liner — Efficient, reliable, powerful providing long life and excellent heat dissipation

TwinTech capability — Hook up two EF2000iSH's for 3600 watts, 30 amps of maximum power (requires accessory cable available at extra cost)

Smart Throttle varies engine speed based on load — Improves fuel economy and reduces noise

Inverter system with Pulse Width Modulation (PWM) control — Produces a pure sine wave to run products with built-in microcomputers or microcomputer-controlled electric tools

Gasoline petcock lets you shut off the gas to run the carb dry for storage — Prevents stale gas problems

Oil Watch Warning system — Prevents engine damage caused by low oil, avoiding costly repairs and minimizing down time, adding customer confidence and peace of mind

Fuel gauge — See fuel gauge at-a-glance

Auto-decompression system — Reduces compression for easier starting

Comfortable grip handle — Easy portability and storage

Electrical overload breaker — Prevents generator damage in case of overload

Centralized controls — Easy access to controls

DC Outlet — 8A 12V outlet for charging batteries (cables included)

Rubber vibration isolation feet — Absorbing feet for smooth operation and noise reduction

Easily detachable side panels — For easier serviceability

Noise Block sound reduction system — Very quiet

EPA & CARB Emission Engine Durability Rating — Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board

50 state legal — Meets EPA emissions and CARB regulations

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Inverter
Maximum AC Output	2000 watts
Rated AC Output	1600 watts
Rated / Maximum AC Current	13.3 / 16.7 amps @ 120V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	79cc
L x W x H	19.3 x 11.0 x 17.9 in
DC Output	8 amps @ 12V
Dry Weight	44.1 lb
Fuel Tank Capacity	1.1 gal
Continuous Operation at 1/4 Rated Load	10.5 hr
Noise Level (1/4 Load - Rated Load)	51.5 - 61 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF2000iS



TOP FEATURES

1. Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board.
2. Gasoline petcock lets you shut off the gas to run the carb dry for storage and helps prevent stale gas problems.
3. Fuel gauge allows fuel level to be seen at-a-glance.
4. The EF2000iS is powerful, portable and retro-modern and delivers maximum output with minimum effort. It weighs a mere 44 compact pounds, making it easy to transport.
5. The EF2000iS is fitted with Yamaha's most technologically sophisticated muffler. It's so quiet that you can have a conversation near one and may not realize it is running. (51.5 dBA to 61 dBA – ¼ rated to rated load).
6. It is very compact (2.2 cu.ft.) which makes it easy to store and transport.
7. If you need extra juice, the EF2000iS has you covered—a convenient parallel function lets you connect two generators to deliver up to 30 maximum amps.
8. Meets even strict California Air Resources Board and Environmental Protection Agency standards for low emissions.
9. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.



YAMAHA
Revs Your Heart™

2015

Generator

EF2000iS

FEATURES & BENEFITS

Light weight— Easy transport

Super-quiet muffler with USFS-approved spark arrestor — Only 51.5 dBA at 1/4 load and eliminates errant sparks

Compact — 2.2 cu.ft. size is easy to store and transport

OHV engine — Includes steel camshaft and valve train components

OHV engine with cast iron cylinder liner — Efficient, reliable, powerful providing long life and excellent heat dissipation

TwinTech™ capability — Hook up two EF2000iS's for 3600 watts, 30 amps of maximum power (requires accessory cable available at extra cost)

Smart Throttle varies engine speed based on load — Improves fuel economy and reduces noise

Inverter system with Pulse Width Modulation (PWM) control — Produces a pure sine wave to run products with built-in microcomputers or microcomputer-controlled electric tools

Gasoline petcock lets you shut off the gas to run the carb dry for storage — Prevents stale gas problems

Oil Watch Warning system — Prevents engine damage caused by low oil, avoiding costly repairs and minimizing down time, adding customer confidence and peace of mind

Fuel gauge — See fuel gauge at-a-glance

Auto-decompression system — Reduces compression for easier starting

Comfortable grip handle — Easy portability and storage

Electrical overload breaker — Prevents generator damage in case of overload

Centralized controls — Easy access to controls

DC Outlet — 8A 12V outlet for charging batteries (cables included)

Rubber vibration isolation feet — Absorbing feet for smooth operation and noise reduction

Easily detachable side panels — For easier serviceability

Noise Block sound reduction system — Very quiet

EPA & CARB Emission Engine Durability Rating — Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board

50 state legal — Meets EPA emissions and CARB regulations

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt™ Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamhamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Inverter
Maximum AC Output	2000 watts
Rated AC Output	1600 watts
Rated / Maximum AC Current	13.3 / 16.7 amps @ 120V
Engine	OHV, forced air-cooled, single cylinder, 4-stroke
Displacement	79cc
L x W x H	19.3 x 11.0 x 17.9 in
DC Output	8 amps @ 12V
Dry Weight	44.1 lb
Fuel Tank Capacity	1.1 gal
Continuous Operation at 1/4 Rated Load	10.5 hr
Noise Level (1/4 Load - Rated Load)	51.5 - 61 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF2400iSHC



TOP FEATURES

1. Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board.
2. Gasoline petcock lets you shut off the gas to run the carb dry for storage and helps prevent stale gas problems.
3. Fuel gauge allows fuel level to be seen at-a-glance.
4. This model boasts High Current output which is designed specifically to increase motor starting capability and to improve air conditioner starting. This High Current model starts most high efficiency 13,500 btu AC in temperatures up to 110° F.
5. The EF2400iSHC has an aluminum die-cast frame, combined with an aluminum TCI rotor and other weight-saving measures to provide a powerful and compact generator weighing only 75 pounds.
6. The EF2400iSHC uses Pulse Width Modulation (PWM) to produce high-quality electricity comparable to the power supplied by public utilities. Use this generator with confidence as a power source for microcomputer-controlled appliances and other devices with built-in computer functions.
7. Yamaha's Smart Throttle feature automatically adjusts engine speed to match the load. The result is quiet running, maximum fuel efficiency, and a run time of 8.6 hours at 1/4-capacity load.
8. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.



YAMAHA
Revs Your Heart™

2015

Generator

EF2400iSHC

FEATURES & BENEFITS

High Current output — Increased motor starting capability and improved air conditioner starting. This High Current model starts most high efficiency 13,500 btu AC in temperatures up to 110° F

Pulse Width Modulation — Provides power that is as clean, or cleaner than commercial power

Smart Throttle feature — Adjusts the engine speed to precisely match the load

Oil Watch Warning system — Prevents engine damage caused by low oil, avoiding costly repairs and minimizing down time, adding customer confidence and peace of mind

OHV engine — Improved efficiency, increased reliability, quieter operation

Compact and lightweight — Easy portability

Versatile power in the silent, 2000-watt class — Will run most 13,500 btu RV air conditioners, microwave/convection ovens, or even the biggest hair blow dryer

Engine speed at full load (2400 watts) is only 3400 rpm — Quiet operation

Cast iron cylinder liner — Provides long engine life and consistent performance during continuous use

Removable back access panel — Easy servicing

Fuel gauge — See fuel level at-a-glance

Aluminum die cast frame — Strong yet lightweight

Gasoline petcock lets you shut off the gas to run the carb dry for storage — Prevents stale gas problems

12 volt DC cable is included as standard equipment — Charge RV, ATV, motorcycle, marine, and automotive batteries

EPA & CARB Emission Engine Durability Rating — Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board

50 state legal — Meets emission regulations, including CARB

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless, Inverter AC Generator
Maximum AC Output	2400 watts
Rated AC Output	2400 watts
Rated AC Current	16.7 / 20 amps @ 120V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	171cc
Engine Speed @ Maximum Output	3400 rpm
12V Battery Charge Cord	Included
DC Output	8 amps @ 12V
L x W x H	20.8 x 16.5 x 18.2 in
Dry Weight	75 lb
Fuel Tank Capacity	1.6 gal
Continuous Operation at 1/4 Rated Load	8.6 hr
Noise Level	53 - 60 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF2600

TOP FEATURES

1. When you are looking for a hard-working, versatile generator that delivers excellent value, the EF2600 is ideal. With 2600-watt output, it is good to have in a home emergency to power most appliances (separately). Also tough and durable on the job site.
2. The EF2600 features a maintenance free brushless alternator, a low-vibration 4-point mounting system inside a rugged frame for smooth, quiet performance.
3. Thanks to a larger-capacity fuel tank, it delivers over 7.8 hours of power.
4. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.
5. The EF2600 is the perfect choice when you want exceptional quality and performance without a premium price tag.



2015

Generator

EF2600

FEATURES & BENEFITS

4-stroke, OHV (overhead valve), single cylinder, air-cooled engine — Improved efficiency, increased reliability and quieter operation

50 state legal — Meets EPA and CARB emission regulations

Auto-decompression system — Reduces compression for easier starting

AC Voltmeter — Provides easy-to-read voltage output

Oil watch warning system — Prevents engine damage, avoids costly repairs and minimizes down time. Provides added peace of mind and enhances long-term durability

AC Non-fuse thermal breaker — Peace of mind and added durability

Fuel gauge — Ability to gauge fuel level without opening cap

Large 2.9 gallon fuel tank — Provides 11 hours of continuous operation @ rated load

Rugged full rollover frame — Added durability and protects generator engine and fuel tank

Mechanical governor — Maintains engine speed to deliver consistent AC output

Specially designed muffler — Reduces weight and noise

Brushless alternator — Maintenance free and reliable

Rubber vibration isolation mounts — Reduces vibration and increases smooth operation

Cast iron cylinder lining — Long engine life, excellent heat dissipation

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless
Maximum AC Output	2600 watts
Rated AC Output	2300 watts
Rated / Maximum AC Current	19 / 21.6 amps @ 120V
Engine	Air-cooled, OHV single cylinder, 4-stroke
Displacement	171cc
L x W x H	20.1 x 16.3 x 16.7 in
Dry Weight	92.6 lb
Fuel Tank Capacity	2.9 gal
Continuous Operation at Rated Load	7.8 hr
Noise Level (1/4 Load - Rated Load)	68 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF2800i



TOP FEATURES

1. The EF2800i weighs just 68 pounds, making it the lightest generator in its class. The key is the multi-pole rotor with a small stator. This design is smaller and lighter than a conventional two-pole alternator with a large stator—and it helps make the EF2800i extremely portable.
2. With the EF2800i, Yamaha has created one of the quietest generators in its class (64-68 dBA). Our engineers looked at the total design, and then made changes where they would be most effective: engine operating speed, intake noise, exhaust noise, and valve train noise.
3. The EF2800i—with its inverter system—features Pulse Width Modulation (PWM) so wavelength distortion is less than 2.5 percent, making it ideal for equipment that requires stable frequency and voltage, such as computers or other sophisticated electronics.
4. Yamaha's Smart Throttle feature automatically adjusts engine speed to match the load. The result is quiet running, maximum fuel efficiency, and a run time of 14.7 hours at $\frac{1}{4}$ rated load.
5. Yamaha's Oil Watch warning system prevents engine damage, avoiding costly repairs and minimizing down time.



2015

Generator

EF2800i

FEATURES & BENEFITS

Inverter system with Pulse Width Modulation (PWM) control — Can power computers, or computer-controlled electric tools or devices

Smart Throttle — Improves fuel economy and reduces noise

Multi-pole alternator — Excellent power output to weight ratio

GFCI (Ground Fault Interrupter Circuit) — Helps reduce the risk of shock

OHV engine — Improved efficiency, increased reliability quieter operation

Cast iron cylinder lining — Provides long engine life and consistent performance during continuous use

Oil Watch Warning System — Prevents engine damage, avoiding costly repairs and minimizing down time

USFS-approved spark arrestor — Reduces chance of fire caused by an errant spark

Noise suppressor — Reduces electrical interference with TVs and radios

Specially designed muffler — Reduces noise and weight

AC non-fuse thermal circuit breaker — Added durability and peace of mind

12-volt DC output — Recharge 12 volt batteries for RV, auto, marine, etc.

Open frame design — Provides a lighter weight and large gasoline capacity

EPA & CARB Emission Engine Life Rating — Yamaha generators have the longest emission engine life ratings issued by the environmental Protection Agency and the California Air Resources Board

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

50 state legal — Meets emission regulations, including CARB

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Great protection

Accessory Hour Meter/Tachometer — Keep track of operation time for service needs

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless, Inverter
Maximum AC Output	2800 watts
Rated AC Output	2500 watts
Rated / Maximum AC Current	20.8 / 23.3 amps @120V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	171cc
L x W x H	19.2 x 15.6 x 16.7 in
DC Output	8.3 amps @ 12V
Dry Weight	68 lb
Fuel Tank Capacity	2.6 gal
Continuous Operation at 1/4 Rated Load	14.7 hr
Noise Level (1/4 Load - Rated Load)	64 - 68 dBA
Warranty	3 years limited warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF3000iS



TOP FEATURES

1. Yamaha generators have the longest emission engine durability ratings issued by the Environmental Protection Agency and the California Air Resources Board.
2. Independent gasoline petcock helps reduce carburetor cleaning and repairs by eliminating stale gas in the carb.
3. The EF3000iS is equipped with advanced features and is extremely quiet yet smartly priced.
4. The EF3000iS includes Yamaha's performance enhancing features, such as Inverter Technology, Smart Throttle, and Noise Block.
5. The EF3000iS is capable of producing clean, high-quality electricity with extremely quiet operation (53 dBA – 60 dBA).
6. This unit also features a fresh, ergonomic design with easy control access.
7. The EF3000iS features built-in wheels, so its remarkably portable - providing convenient power to the locations you need it most.
8. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.

 **YAMAHA**
Revs Your Heart™

2015

Generator

EF3000iS

FEATURES & BENEFITS

Noise Block, acoustically designed sound reduction system — Sound absorbing material, used in key locations, does not resonate sound. Newly designed muffler and molded fan produce unbeatable noise reduction at 53 - 60 dBA

Independent gasoline petcock — Helps reduce carburetor cleaning and repairs by eliminating stale gas in the carburetor

Smart Throttle, load sensing rpm control — Greater fuel efficiency and noise reduction by automatically adjusting engine speed to match the load

Long run time — Continuous operation for up to 19 hours without refueling (at 1/4 rated load with "Smart Throttle" function on)

12 Volt DC output, battery charging cables included — Recharge 12-volt batteries for RV, auto, marine, etc.

Inverter system with Pulse Width Modulation (PWM) control — Can run products with built-in microcomputers, or microcomputer-controlled electric tools

Centralized control panel — Easy access to controls

171cc Overhead Valve (OHV) engine — Noise-reducing operation with improved efficiency, increased reliability, and low oil consumption

Oil Watch Warning system — Prevents engine damage to avoid costly repairs and minimize down time adds customer confidence and peace of mind

Four wheels with parking brake — Easy transport and mobility

EPA & CARB Emission Engine Life Rating — Yamaha generators have the longest emission engine life ratings issued by the environmental

Automatic decompression — Greatly reduces starting effort

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt™ Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless, Inverter
Maximum AC Output	3000 watts
Rated AC Output	2800 watts
Rated / Maximum AC Current	23.3 / 25.0 amps @ 120V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	171cc
DC Output	12 amps @ 12V
L x W x H	26.8 x 17.5 x 21.9 in
Dry Weight	136 lb
Fuel Tank Capacity	3.4 gal
Continuous Operation at 1/4 Rated Load	18.6 hr
Noise Level (1/4 Load - Rated Load)	53 - 60 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF3000iSEB



TOP FEATURES

1. The Yamaha EF3000iSEB is one of the most technologically advanced inverter generators available. Get that extra "boost" of power to get your power tool or air conditioner started quickly and efficiently thanks to the EF3000iSEB generator from Yamaha. The "B" on EF3000iSEB means it features Yamaha Boost Technology®, which provides additional power when you need it. Perfect for the RV enthusiast, the EF3000iSEB is an ideal source of power for either a fifth wheel or travel trailer. The Boost Control Unit in the generator automatically senses when you need additional boost and uses power from the internal 12-volt battery to produce additional amperage. With the additional 10-second boost, the power is comparable to a conventional 3500-watt generator.
2. The EF3000iSEB includes Yamaha's performance enhancing features, such as Inverter Technology, Smart Throttle, and Noise Block.
3. The EF3000iSEB is capable of producing clean, high-quality electricity with extremely quiet operation (53 dBA – 60 dBA).
4. The EF3000iSEB features a fresh, ergonomic design with easy control access, effortless electric starting.
5. The Yamaha EF3000iSEB has built-in wheels, so it's remarkably portable - providing convenient power to the locations you need it most.
6. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.

 **YAMAHA**
Revs Your Heart™

2015

Generator

EF3000iSEB

FEATURES & BENEFITS

Yamaha Boost Technology® (YBT) — Boosts output by adding battery voltage to alternator output when needed. The Boost Control Unit (BCU) senses when extra power is needed and boosts output for up to 10 seconds, giving air conditioners, power tools, and other equipment the extra boost of power they may need to start quickly and efficiently

Noise Block, acoustically designed sound reduction system — Sound absorbing material, used in key locations, does not resonate sound. Newly designed muffler and molded fan produce unbeatable noise reduction

Smart Throttle, load sensing rpm control — Greater fuel efficiency and noise reduction by automatically adjusting engine speed to match the load

Long run time — Continuous operation for up to 19 hours without refueling (at 1/4 rated load with "Smart Throttle" function on)

12 Volt DC output, battery charging cables included — Recharge 12-volt batteries for RV, auto, marine, etc.

Inverter system with Pulse Width Modulation (PWM) control — Can run products with built-in microcomputers, or microcomputer-controlled electric tools

Centralized control panel — Easy access to controls

Electric starter — Effortless starting and ease of operation (battery included)

171cc Overhead Valve (OHV) engine — Noise-reducing operation with improved efficiency, increased reliability, and low oil consumption

Oil Watch Warning system — Prevents engine damage to avoid costly repairs and minimize down time adds customer confidence and peace of mind

Four wheels with parking brake — Easy transport and mobility

EPA & CARB Emission Engine Life Rating — Yamaha generators have the longest emission durability engine ratings issued by the environmental Protection Agency and the California Air Resources Board

Factory Warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

50 state legal — Meets emission regulations, including CARB

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt™ Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless, Inverter
Maximum AC Output	3000 watts + 500 watts boost
Rated AC Output	2800 watts
Rated / Maximum AC Current	23.3 / 25.0 amps @ 120V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	171cc
Ignition System	Electric w/ recoil & auto decompressor
DC Output	12 amps @ 12V
L x W x H	26.8 x 17.5 x 21.9 in
Dry Weight	154.3 lb
Fuel Tank Capacity	3.4 gal
Continuous Operation at 1/4 Rated Load	18.6 hr
Noise Level (1/4 Load - Rated Load)	53 - 60 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF4500iSE



TOP FEATURES

- 1.** The EF4500iSE picks up where our extremely successful EF3000iSEB leaves off, with even more power and fuel efficiency in a quiet, portable package. Designed for maximum fuel efficiency and minimum noise, its super-powerful engine allows it to run at the very low engine speed of just 2600 rpm - 1000 rpm lower than other generators in its class.
- 2.** That slow engine speed pays off big time in reduced fuel consumption as well as less noise, vibration, and engine wear. Up to 15.2 hours run time at 1/4 rated load.
- 3.** The EF4500iSE features Noise Block sound reduction system which makes it a very quiet generator for its output. 58-60 decibels.
- 4.** 4500 watt maximum output, 4000 watt rated continuous output suitable for running most 15,000 BTU RV air conditioners and 1000 watt microwave oven, or two major RV appliances, simultaneously.
- 5.** Electric start makes starting effortless—turn the key to start and power appliances you want and you can add an optional wireless remote control for easier starting.
- 6.** Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.



2015

Generator

EF4500iSE

FEATURES & BENEFITS

4500 watt maximum output, 4000 watt rated continuous output — Suitable for running most 15,000 BTU RV air conditioners and 1000 watt microwave oven, or two major RV appliances simultaneously.

Noise Block sound reduction system — Very quiet 58-60 decibels

Low speed running — Using the most powerful engine in its class to run at a constant ultra low speed of 2600 rpm to reduce gasoline consumption, extend running time between refueling and reduce noise and engine wear

Up to 15.2 hours running time at one quarter rated load between refueling

50 state legal — Meets CARB emission regulations and given highest EPA rating

Pulse Width Modulation Inverter System — Sine wave as clean as or cleaner than household electricity. Suitable for computers, televisions, satellite TV systems and other sensitive electronic equipment and appliances

Optional wireless remote control — Start and stop the generator from up to 66 feet away

Electric start — Effortless turn the key to start

Automatic choke — Easy starting even in cold climates

Low oil warning system — Shuts the engine off to protect the engine if the oil level drops

Power meter — Easy to read meter indicates the amount of power being used and the amount that's available

Hour meter — Displays the amount of running time accumulated to indicate servicing or refueling interval

Twin bar — Aids in lifting and loading. Also utilize for transport and anti-theft security

Gas gauge — Indicates amount of gasoline to indicate refueling interval

Factory warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

Stylish design — Attractive and practical

Four wheels with parking brake — Easy transport and security

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt™ Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless, Inverter
Maximum AC Output	4500 watts
Rated AC Output	4000 watts
Rated / Maximum AC Current	33.3 / 37.5 amps @ 120V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	357cc
L x W x H	30.7 x 24.3 x 27.2 in
Dry Weight	194 lb
Fuel Tank Capacity	4.5 gal
Continuous Operation at 1/4 Rated Load	15.2 hr
Noise Level (1/4 Load - Rated Load)	58 - 60 dBA
Starting System	Electric start w/automatic choke (optional wireless remote)
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF6300iSDE



TOP FEATURES

1. The EF6300iSDE cranks out up to 6300 watts of pure sine wave inverter.
2. With sophisticated capabilities like dual 120-volt and 240-volt power, you can run almost any type of equipment with total confidence. From high-demand equipment such as well pumps, compressors and RV air conditioners to sensitive electronics like plasma TVs, satellite receivers and computers.
3. With its electric starting capability, the automatic choke makes for easy starting. The EF6300iSDE is ideal for outdoor recreation and power outage emergencies.
4. Excellent fuel efficiency means a run time of 13.3 hours at a constant 1/4 load on just a single tank of gas.
5. The EF6300iSDE features Noise Block sound reduction system which makes it a very quiet generator for its output; 58-64 decibels.
6. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.



2015

Generator

EF6300iSDE

FEATURES & BENEFITS

Noise Block — Quiet, pleasant to use

Pure Sine Wave (Pulse Width Modulation) Inverter System — Run electronic equipment, appliances, variable-speed power tools and computers

Smart Throttle — Automatically adjusts engine speed to match power demand, reduces noise, fuel consumption and engine wear

Wireless Remote (Optional) — Start & Stop the generator from up to 66 feet away

Electric start — Effortless starting (battery included)

Automatic choke — Effortless starting

Low oil shutoff — Protects engine from low oil damage

Fuel level gauge — See fuel level at a glance

Dual voltage 120/240 volt — Versatile, operate variety of 120V and 240V tools and appliances

Power meter — See how much power is being used and how much power is available

Hour meter — Shows accumulated running time for refueling and service scheduling

Lightweight — Easy transport

Twin bar — Aid lift, transport and provide security point

Stylish design — Nice appearance and Modern design

50 state legal — Meets CARB emission regulations and given highest EPA rating

AVAILABLE ACCESSORIES & OPTIONS

Accessory Cover — Added protection, includes a storage pocket for Owner's manual, tool kit, and battery charging cables

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt™ Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brushless, Inverter
Maximum AC Output	6300 watts
Rated AC Output	5500 watts
Rated / Maximum AC Current	45.8 amps / 52.5 amps @120V 22.9 amps / 26.3 amps @ 240V
Engine	OHV, air-cooled, single cylinder, 4-stroke
Displacement	357cc
L x W x H	30.7 x 24.3 x 27.2 in
Dry Weight	200 lb
Fuel Tank Capacity	4.5 gal
Continuous Operation at 1/4 Rated Load	13.3 hr
Noise Level (1/4 Load - Rated Load)	58 - 64 dBA
Starting System	Electric start w/automatic choke (optional wireless remote)
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF12000DE

TOP FEATURES

1. With up to 50 amps 240V and 120/240 dual voltage output, the EF12000DE can handle most anything during a power outage.
2. The EF12000DE is our highest output gasoline-powered 120/240-volt output generator.
3. It uses a twin-cylinder 653cc, 4-stroke, OHV engine to deliver 12,000 watts maximum AC output with outstanding fuel efficiency.
4. It has the convenience of electric starting* and its compact size makes it highly portable.
5. It provides 8 hours of continuous operation at rated load without refueling to power up super heavy-load equipment like well pumps, air compressors, table saws and more. Great as a backup generator.

* Battery not included



 **YAMAHA**
Revs Your Heart™

2015

Generator

EF12000DE

FEATURES & BENEFITS

Dual voltage — Provides the versatility of 120 and 240 volt operation

OHV engine (overhead valve) — Precise valve actuation and heavy-duty design offer improved efficiency, increased reliability and quiet operation

Cast iron cylinder lining — Provides optimal heat dissipation, consistent performance during continuous use and long engine life

Oil Watch Warning System — Automatically shuts off before oil level is low and cannot be re-started until oil is added. Prevents engine damage and costly repairs while enhancing long-term durability

Auto Voltage Regulation — Guarantees correct power delivery even with extension cords, enhances performance, adds convenience

Transistor Controlled Ignition (T.C.I.) — Provides clean, efficient spark that ensures fast, easy starting. Low maintenance, reliable operation

Noise suppressor — Reduces electrical interference with TVs and radios

Auto decompression — Automatically "opens" exhaust valve slightly to reduce initial back pressure when starting making manual starting effortless

USFS-approved spark arrestor — Offers quiet operation and keeps sparks from exiting exhaust system, reducing chance of fires caused by an errant spark

GFCI — Ground Fault Circuit Interruption shuts off power when it senses a leak to ground to reduce risk of electric shock

Fuel gauge — Lets operator monitor how much fuel is left

Electric starter* — For convenient ease of operation

* Battery not included

Economy idle — When there is no load on the generator, it automatically returns to idle for improved fuel efficiency and quieter operation

AC non-fuse thermal breaker — Protects AC circuit in case of an overload for added durability and peace of mind

Wheel kit Easier service, added value

Tool kit — Makes service easier

Factory warranty — Covers the entire generator for defects in parts and workmanship for three (3) years

AVAILABLE ACCESSORIES & OPTIONS

Accessory Remote Control — With a 33 ft. cord

Accessory Hour Meter/Tachometer — Keep track of running time for service needs

Am/Watt Appliance Load Tester — Gives quick, accurate readout of watts or amps used by 120 volt AC electrical devices

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Brush, AVR, dual voltage, AC generator
Maximum AC Output	12,000 watts
Rated AC Output	9500 watts
Rated / Maximum AC Current	79.2 / 100.0 amps @ 120V 39.6 / 50.0 amps @ 240V
Engine	OHV, air-cooled, twin cylinder, 4-stroke
Displacement	653cc
L x W x H	33.3 x 29.6 x 33.3 in
Dry Weight	327.8 lb
Fuel Tank Capacity	11.4 gal
Continuous Operation at Rated Load	8 hr
Noise Level	80 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF5500D/DE



TOP FEATURES

1. Reduced price, more wattage – Great value with the same legendary quality and performance.
2. The EF5500DE comes with an electric starter and auto choke for effortless push button starting.
3. Comes standard with wheels, fold-down/locking handles. Battery standard on DE model.
4. Nine hours run time at full load – 13% longer run time than previous model.
5. Digital Hour Meter, Digital Volt Meter displays total run time accumulation for servicing and indicates the voltage output.
6. 3 year industrial and residential warranty with optional Y.E.S. for customer peace of mind.
7. Lifting eye for convenient for hoisting and security.
8. OHV engine offers efficiency, increased reliability, and quieter operation.
9. Full power, full time 120/240 dual voltage is ideal for the job site or home backup.
10. Ground Fault Circuit Interruption (GFCI) senses a leak to ground to reduce risk of electric shock.
11. Fuel gauge provides easy monitoring of fuel level.
12. The EF5500D/DE features a rugged design with full roll cage protection for heavy jobs.



YAMAHA
Revs Your Heart™

2015

Generator

EF5500D/DE

FEATURES & BENEFITS

New and improved OHV MZ360 engine with a hemispherical head — Yamaha legendary durability and reliability with increased fuel efficiency

Rugged Wheel kit w/fold-down locking handles — Standard on EF5500DE and EF5500D

The battery is standard on the EF5500DE — Great value and added convenience for starting

Cast iron cylinder lining — Optimal heat dissipation

Automatic oil warning system shuts off engine before oil level is low — Prevents engine damage, avoids costly repairs, minimizes down time, enhances long term durability

Transistorized ignition provides lean, efficient spark — Maintenance-free and ensures fast, easy starting, reliable operation

Auto decompression — Automatically “opens” exhaust valve to reduce compression for easier starting

EPA Emission Engine Life Rating — The EF5500DE and EF5500D meet the strictest environmental standards - EPA and CARB

Ground Fault Circuit Interrupter (G.F.C.I.) — If the system senses a leak to “ground,” it automatically cuts off power to help prevent injuries

Fuel gauge — Lets operator monitor how much fuel is available

Tool kit — Makes service easier

AVAILABLE ACCESSORIES & OPTIONS

Wired Remote Kit — Features a 33-foot cord with remote starter switch

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Dual voltage, Brushless, AC Generator
Maximum AC Output	5500 watts
Rated AC Output	4500 watts
Rated / Maximum AC Current	36.0/44.0 amps @125V 18.75/22.9 amps @240V
Engine	MZ360
Displacement	358cc
L x W x H	31.5 x 28.4 x 29.1 in
Dry Weight	D = 212 lb, DE = 234 lb
Fuel Tank Capacity	6.9 gal
Continuous Operation at Rated Load	9.0 hr
Noise Level	74.1 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Generator

EF7200D/DE



TOP FEATURES

1. Reduced price, more wattage, the EF7200D/DE is a great value with the same legendary quality and performance.
2. The EF7200DE comes with an electric starter and auto choke for effortless push button starting.
3. Comes standard with wheels, fold-down/locking handles. Battery standard on DE model.
4. Eight hours run time at full load – 18% longer run time than previous model.
5. Digital hour meter, and digital volt meter display total run time accumulation for servicing and indicates the voltage output.
6. 3 year industrial and residential warranty with optional Y.E.S. for customer peace of mind.
7. Lifting eye for convenient for hoisting and security.
8. OHV engine offers efficiency, increased reliability, and quieter operation.
9. Full power, full time 120/240 dual voltage is great for the job site or home backup.
10. Ground Fault Circuit Interruption (GFCI) senses a leak to ground to reduce risk of electric shock.
11. Fuel gauge provides easy monitoring of fuel level.
12. The EF7200D/DE features a rugged design with full roll cage protection for heavy jobs.



2015

Generator

EF7200D/DE

FEATURES & BENEFITS

New and improved OHV MZ360 engine with a hemispherical head — Yamaha legendary durability and reliability with increased fuel efficiency

Rugged Wheel kit w/fold-down locking handles — Standard on EF7200DE and EF7200D

The battery is standard on the EF7200DE — Great value and added convenience for starting

Cast iron cylinder lining — Optimal heat dissipation

Automatic oil warning system shuts off engine before oil level is low — Prevents engine damage, avoids costly repairs, minimizes down time, enhances long term durability

Transistor Controlled Ignition (T.C.I.) — Provides clean, efficient spark that ensures fast, easy starting. Low maintenance, reliable operation

Auto decompression — Automatically “opens” exhaust valve slightly to reduce initial back pressure when starting making manual starting effortless

EPA Emission Engine Life Rating — The EF7200DE and EF7200D meet the strictest environmental standards - EPA and CARB

Ground Fault Circuit Interrupter (G.F.C.I.) — If the system senses a leak to “ground,” it automatically cuts off power to help prevent injuries

Fuel gauge — Lets operator monitor how much fuel is available

Tool kit — Makes service easier

AVAILABLE ACCESSORIES & OPTIONS

Wired Remote Kit — Features a 33-foot cord with remote starter switch

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Type	Dual voltage, brushless, AC Generator
Maximum AC Output	7200 watts
Rated AC Output	6000 watts
Rated / Maximum AC Current	50.0 / 60.0 amps @ 125V 25.0 / 30.0 amps @ 240V
Engine	MZ360
Displacement	358cc
L x W x H	31.5 x 28.4 x 29.1 in
Dry Weight	D = 212 lb, DE = 236
Fuel Tank Capacity	6.9 gal
Continuous Operation at Rated Load	8.0 hr
Noise Level	74.5 dBA
Warranty	3 Years Limited Warranty

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Pressure Washer

PW4040



TOP FEATURES

1. Reliable Yamaha power; dependable 357cc 4-stroke, OHV, air-cooled engine from the name you know you can trust.
2. Real Performance that delivers 4000 psi and 4.0 gpm to get the job done quickly.
3. Durable, brass Triplex CAT Pump® is the world leader in quality pressure washer pumps.
4. Pivoting Tip offers convenient reach into wheel wells, under vehicles and more.
5. Multi-Tip Selection: 0° Tip, 15° Tip, 25° Tip, 35° Tip, 40° Tip all located on a rubber casing that can attach to the pressure washer gun or be clipped to a belt loop.
6. Rotating Handle rotates 360° for better handling and ease of use.
7. Tough 50' steel braided and rubber coated hose has a longer reach to clean larger jobs.
8. Corrosion Resistant - All brass connectors and hose fittings.
9. Never flat tires means no fuss, non-pneumatic tires.
10. Folding handle folds flat for convenient storage.
11. Automatic idle down reduces fuel consumption and extends engine life.
12. 3 year industrial and residential warranty* - with optional Y.E.S. for customer peace of mind.

**Commercial/Rental Use limited 1 year*



2015

Pressure Washer

PW4040

FEATURES & BENEFITS

4000 PSI & 4.0 gallons per minute — Industrial grade pressure and performance to tackle tough jobs

CAT All brass Triplex Pump® — High Quality pump, excellent performance and durability

MZ360 commercial grade engine — Idle down technology saves fuel, less noise and reduces wear and tear

Pivoting tip — Allows user to clean in tough to reach areas

Rotating handle — Rotates 360° and locks into place for better handling and ease of use

Professional style quick-connect nozzles — (0°, 15°, 25°, 40°, soap) including handle mount nozzle holder

Multi-tip selection — choose from :
0° Tip Blasting Between Bricks
15° Blowing Paint off a Wall
25° Tip Cleaning Cement Mixer
40° Tip Cleaning Dirt off an ATV
Soap Tip

3-Position pivot nozzle — Direct spray at various angles

Tough 50' braided steel and rubber coated hose — Longer reach to clean larger jobs. Save 100' of walking every time you want to change tips

Corrosion resistant — All brass connectors and hose fittings for durability and dependability

Steel wheels and axles — No breakdowns, long lasting

Hand truck roll cage frame — Easy transport and durability

Wide, non-pneumatic tires — Transport is made easy in rough terrain. Never flat tires

Tool kit — Makes service easier

Automatic Idle Down — Reduces fuel consumption and extends engine life

Folding handle — Folds flat for convenient storage

3-Year Factory Limited Warranty* — Now that's peace of mind supported by a nationwide network of Yamaha dealers
**Commercial/Rental Use limited 1 year*

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

AVAILABLE ACCESSORIES & OPTIONS

Accessory Gutter Cleaner — Assists in cleaning gutters. Quick-connect capable

Accessory Hose Adapter Kit — Easy attachment to garden hoses with quick-connect adapter

Accessory Nozzle Kit — Features 0°, 25°, 40°, Soap and 800 psi nozzles for cleaning a variety of surfaces. Quick-connect capable

Accessory Steel Braided Hose — 30-foot steel braided hose. Can link to existing hoses. Quick-connect capable

Accessory Surface Cleaner — Cleans large surfaces with rotating nozzles and a 15" surface path. Quick-connect capable

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Engine	357cc OHV 4-stroke, single cylinder, air-cooled, EPA & CARB approved
Starting Method	Recoil w/auto decompression
Length	26 in
Width	29 in
Height Handle Up	42 in
Height Handle Down	24 in
Weight	171 lb
Fuel Tank Capacity	1.61 gal
Tips	0° Tip, 15° Tip, 25° Tip, 40° Tip, Soap Tip
Hose	50 ft
Tires	Never flat, 12 x 4 in
PSI	4000
GPM	4.0
Warranty	3 Years Limited Warranty* - with optional Y.E.S. <small>*Commercial/Rental Use Limited Warranty 1 Year</small>

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.

2015

Pressure Washer

PW3028



TOP FEATURES

1. Reliable Yamaha power, dependable 192cc 4-stroke, OHV, air-cooled engine from the name you can trust.
2. Equipped with brass Triplex CAT Pump® — the world leader in quality pressure washer pumps.
3. 5-in-1 nozzle including low pressure 800 PSI pattern means that you'll always have the correct nozzle that best suits the cleaning job.
4. Pivoting tip makes cleaning on top, or below obstacles a snap.
5. Automatic idle down reduces noise and fuel consumption while increasing engine life.
6. Gasoline petcock allows you to shut of the gas to run the carb dry for storage which helps prevent stale gas problems.
7. Yamaha's Oil Watch Warning System helps prevent engine damage from low oil and provides added peace of mind.
8. Large, wide never flat tires float over soft, irregular ground and obstacles.
9. Yamalube® engine oil and Fuel Med RX included.
10. Easy assembly.
11. Durable powder coat paint for lasting beauty.
12. Steel wheels and axles stay true for tough durable service, no wheel wobble or broken wheels.
13. Easy oil change design makes oil drain and fill a snap.



2015

Pressure Washer

PW3028

FEATURES & BENEFITS

Reliable Yamaha power — Dependable 192cc 4-stroke, OHV, air-cooled engine from the name you know you can trust

5-in-1 Nozzle — You've always got the right tip for your job with you

Durable, brass Triplex CAT Pump® — The world leader in quality pressure washer pumps

Protective rubber overmold — Protect what you're washing from scratches

Pivoting tip — Convenient reach into wheel wells, under vehicles and more

Real performance — Delivers 3000 psi and 2.8 gpm to get the job done quickly

30-foot hose — Steel braided high-pressure hose means longer reach

Built-in detergent tank — Great maneuverability with no tank to fall off mid-job. Flexibility to use external detergent container for large jobs

Corrosion resistant — All brass connectors and hose fittings provide longer life

Never-flat tires — No fuss, non-pneumatic tires

Folding handle — Folds flat for convenient storage

Automatic Idle Down — Reduces fuel consumption and extends engine life

360° rotating grip — The rotating grip can be positioned to right or left hand operation or whatever position feels the most comfortable and makes the cleaning job easier

3-Year Factory Limited Warranty* — Now that's peace of mind supported by a nationwide network of Yamaha dealers

**Commercial/Rental Use limited 1 year*

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

AVAILABLE ACCESSORIES & OPTIONS

Accessory Gutter Cleaner — Assists in cleaning gutters. Quick-connect capable

Accessory Hose Adapter Kit — Easy attachment to garden hoses with quick-connect adapter

Accessory Nozzle Kit — Features 0°, 25°, 40°, Soap and 800 psi nozzles for cleaning a variety of surfaces. Quick-connect capable

Accessory Steel Braided hose — 30-foot steel braided hose. Can link to existing hoses. Quick-connect capable

Accessory Surface Cleaner — Cleans large surfaces with rotating nozzles and a 15" surface path. Quick-connect capable

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Engine Type	OHV, air-cooled, single cylinder, 4-stroke, EPA & CARB approved
Starting Method	Recoil w/auto decompression
Length	24.0 in
Width	26.0 in
Height Handle Up	41.5 in
Height Handle Down	25.0 in
Fuel Tank Capacity	1.5 gal
Run Time	1.5 - 2.0 hr
Dry Weight	96 lb
5-in-1 Nozzle Tips	5 in 1: 25° 3000psi, 40° 3000psi, 25° 800 psi, Soap Jet, Soap Fan
Hose	30 ft
Tires	Never flat, 13 x 5 x 6 in
PSI	3000
Low Pressure Nozzle	800 psi
GPM	2.8 gal
Warranty	3 Years Limited Warranty* <small>*Commercial/Rental Use Limited Warranty 1 Year</small>

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.


2015

Pumps

YP40T

TOP FEATURES

- 1.** The YP40T uses a 357cc, OHV 4-stroke engine that is quieter, more powerful, and consumes less fuel than comparable engines. Pumps up to 449 gal/min (26,940 gal/hr) through a four-inch port.
- 2.** Delivers a 89-foot total head, with a 26-foot suction head.
- 3.** Can handle solids up to 1 1/16 inch.
- 4.** Impeller and volute case are cast iron for greater strength and durability; and they withstand wear from grit, sand, silt, etc.
- 5.** Dependable carbon-ceramic mechanical seals are durable, easy to replace and they reduce abrasion for long pump life.
- 6.** 4-inch Standard National Pipe Thread (NPT) fittings connect easily with the suction and discharge hoses.

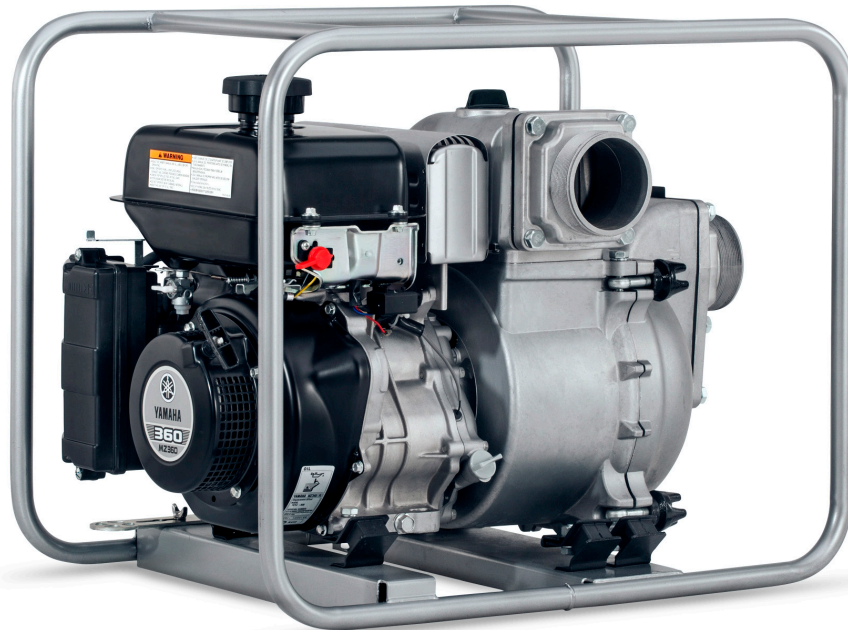

2015

Pump

YP40T

FEATURES & BENEFITS

Dewatering applications — Use for these types of Dewatering applications: job site excavations, utility vaults, motocross tracks, mining sites, lakes and ponds, and barge holds

Powerful pump — Pumps up to 449 gal/min (26,940 gallons per hour). Use for moving massive amounts of water.

Solid Handling Capability — Can handle solids up to 1 1/16 inch

Cast iron cylinder lining — Optimal heat dissipation

Automatic oil warning system shuts off engine before oil level is low — Prevents engine damage, avoids costly repairs, minimizes down time and enhances long term durability

Transistor Controlled Ignition (T.C.I.) — Provides clean, efficient spark that ensures fast, easy starting. Low maintenance, reliable operation

Auto decompression — Automatically “opens” exhaust valve to reduce compression for easier starting

EPA Emission Engine Life Rating — The YP40T meets the strictest environmental standards - EPA and CARB

3-Year Factory Limited Warranty — Applies to both industrial and residential use

Yamaha Extended Service — Additional 1, 2 or 3 years of Y.E.S. is available

yamahamotorsports.com

ACCESSORIES

Visit yamahapartsandaccessories.com

SPECIFICATIONS

Pump Type	Self-priming, Centrifugal
Suction Port	4 in
Discharge Port	4 in
Discharge Capacity	449 gal / min
Self Priming Time	200 secs @ 26.25 ft
Total Head	89 ft
Delivery Head	26 ft
Solids Handling (Max)	327.8 lb
Engine	MZ360 OHV, air-cooled, single cylinder, 4-stroke
Fuel Capacity	1.6 gal
Fuel Consumption	1.16 gal/hr
L x W x H	30.1 x 21.4 x 24.6 in
Dry Weight	174 lb
Residential Warranty	3 years
Commercial Warranty	3 years

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2014 Yamaha Motor Corporation, U.S.A. All rights reserved.